



*Assembled in the USA using domestic and foreign parts

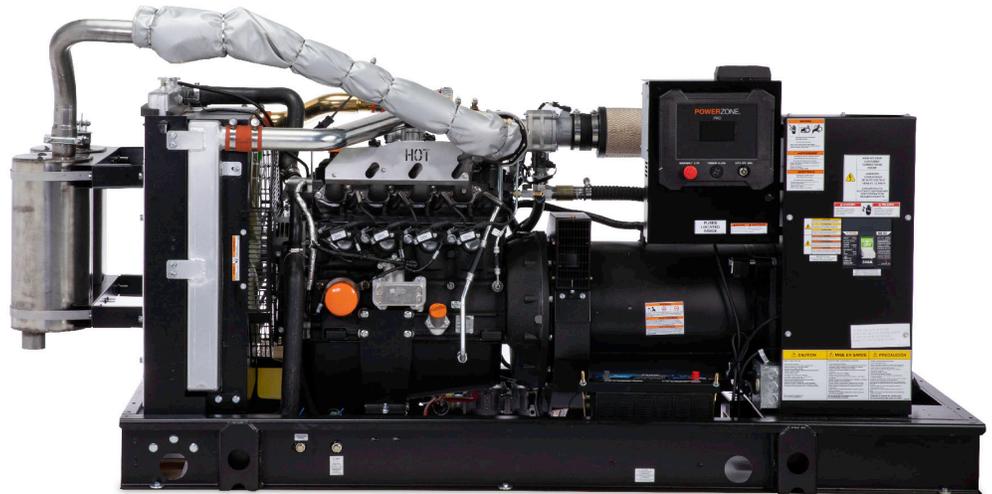


Image used for illustration purposes only

| Power Ratings | | |
|---------------|---------|--------------|
| GGW060 | Standby | 60 kVA/48 kW |
| | Prime | 54 kVA/43 kW |

Codes and Standards

Not all codes and standards apply to all configurations. Contact factory for details.



BS5514 and DIN 6271



SAE J1349



ISO 3046, 7637, 8528, 9001



NEMA ICS10, MG1, 250, ICS6, AB1



ANSI C62.41

ENERGY GENERATION

PRAMAC ensures superior quality and performance by managing all aspects of production: from design to manufacturing.

PRAMAC can trace its roots back to 1966; from then onwards it has been expanding its activity in the energy and material-handling sector, continuously growing globally with a wide and flexible product range.

In the field of power generation, PRAMAC offers solutions for every kind of power supply demand: portable and industrial generators for stand by and prime power applications, and mobile and towable lighting for outdoor needs.

PRAMAC operates through a wide distribution network and provides global coverage even in the most demanding markets.

GGW060 | 4.5L | 60 kVA INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



STANDARD FEATURES

ENGINE SYSTEM

- Oil Drain Extension
- Heavy Duty Air Cleaner
- Level 1 Fan and Belt Guards (Open Set Only)
- Stainless Steel Flexible Exhaust Connection
- Factory Filled Oil and Coolant
- Critical Silencer
- Oil Temperature Sender with Alarm
- Air Filter Restriction Indicator

FUEL SYSTEM

- NPT Fuel Connection on Frame
- Primary and Secondary Fuel Shutoff

COOLING SYSTEM

- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Factory-Installed Radiator
- 50/50 Ethylene Glycol Antifreeze
- Radiator Drain Extension

ELECTRICAL SYSTEM

- Battery Charging Alternator
- Battery Cables
- Battery Tray
- Rubber-Booted Engine Electrical Connections
- Solenoid Activated Starter Motor

ALTERNATOR SYSTEM

- GENprotect™
- Class H Insulation Material
- 2/3 Pitch
- Skewed Stator
- Brushless Excitation
- Sealed Bearing
- Full Load Capacity Alternator

GENERATOR SET

- Internal Genset Vibration Isolation
- Separation of Circuits - High/Low Voltage
- Separation of Circuits - Multiple Breakers
- Wrapped Exhaust Piping
- Standard Factory Testing
- 2 Year Limited Warranty (Standby Rated Units)
- 1 Year Limited Warranty (Prime Rated Units)

ENCLOSURE (If Selected)

- Rust-Proof Fasteners with Nylon Washers to Protect Finish
- High Performance Sound-Absorbing Material (Sound Attenuated Enclosures)
- Gasketed Doors
- Upward Facing Discharge Hoods (Radiator and Exhaust)
- Stainless Steel Lift Off Door Hinges
- Stainless Steel Lockable Handles
- RhinoCoat™ - Textured Polyester Powder Coat Paint

CONTROL SYSTEM



Power Zone® Pro Controller

- NFPA 110 Level 1 Compliant
- Engine Protective Functions
- Alternator Protective Functions
- Digital Engine Governor Control
- Digital Voltage Regulator
- Multiple Programmable Inputs and Outputs
- Remote Display Capability
- Remote Communication via Modbus® RTU, Modbus TCP/IP, and Ethernet 10/100
- Alarm and Event Logging with Real Time Stamping

- Expandable Analog and Digital Inputs and Outputs
- Remote Wireless Software Update Capable
- Wi-Fi®, Bluetooth®, BMS, and Remote Telemetry
- Built-In Programmable Logic Eliminates the Need for External Controllers Under Most Conditions
- Programmable I/O Channel Properties
- Built-In Diagnostics

Alarms and Warnings

- High/Low Oil Pressure
- High/Low Coolant Level
- High/Low Coolant Temperature
- Sender/Sensor Failure
- High/Low Oil Temperature
- Over Total kW
- Over/Under Speed
- Over/Under Voltage
- Over/Under Frequency
- Over Current
- High/Low Battery Voltage
- Battery Charger Current
- Phase to Phase and Phase to Neutral Short Circuits (I²T Algorithm)

4.3 Inch Color Touch Screen Display

- Resistive Color Touch Screen
- Easily Identifiable Icons
- Multi-Lingual
- On Screen Editable Parameters
- Key Function Monitoring
- Three Phase Voltage, Amperage, kW, kVA, and kVAr
- Selectable Line to Line or Line to Neutral Measurements
- Frequency
- Engine Speed
- Engine Coolant Temperature
- Engine Oil Pressure
- Engine Oil Temperature
- Battery Voltage
- Hourmeter
- Warning and Alarm Indication
- Diagnostics
- Maintenance Events/Information

GGW060 | 4.5L | 60 kVA INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



CONFIGURABLE OPTIONS

ENGINE SYSTEM

- Heater with Shutoff Valves
- Engine Coolant Heater
- Oil Heater
- Level 1 Fan and Belt Guards (Enclosed Units Only)
- Radiator Duct Adapter (Open Set Only)
- Two-Stage Heavy Duty Air Cleaner

ELECTRICAL SYSTEM

- 10A Battery Charger
- Battery Warmer

ALTERNATOR SYSTEM

- Alternator Upsizing
- Anti-Condensation Heater
- Tropical Coating

CIRCUIT BREAKER OPTIONS

- Main Line Circuit Breaker
- 2nd Main Line Circuit Breaker
- 3rd Main Line Circuit Breaker
- Shunt Trip and Auxiliary Contact
- Electronic Trip Breakers

FUEL SYSTEM

- NPT Flexible Fuel System

GENERATOR SET

- Extended Factory Testing (3-Phase Only)
- 8 Position Load Center

ENCLOSURE

- Level 0 Sound Attenuated
- Level 1 Sound Attenuated
- Level 2 Sound Attenuated
- Level 2 Sound Attenuated with Motorized Dampers
- Steel Enclosure
- Aluminum Enclosure
- Up to 322 KPH Wind Load Rating (Contact Factory for Availability)
- AC/DC Enclosure Lighting Kit
- Enclosure Heaters (with Motorized Dampers Only)
- Door Open Alarm Horn
- Spring or Pad Vibration Isolators

CONTROL SYSTEM

- 21-Light Remote Annunciator
- Remote Relay Assembly (8 or 16)
- Remote E-Stop (Break Glass-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Flush Mount)
- 10A Engine Run Relay
- Ground Fault Annunciator
- 120V GFCI and 240V Outlets
- 100 dB Alarm Horn
- Damper Alarm Contacts (with Motorized Dampers Only)
- Wi-Fi Extension Kit

ENGINEERED OPTIONS

CONTROL SYSTEM

- Spare Inputs (x4) / Outputs (x4)
- Battery Disconnect Switch

GENERATOR SET

- Special Testing
- Battery Box

GGW060 | 4.5L | 60 kVA
INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

General

| | |
|-------------------------------------|--|
| Make | Generac |
| Cylinder # | 4 |
| Type | In-Line |
| Displacement - L (in ³) | 4.5 (275.0) |
| Bore - mm (in) | 114.3 (4.5) |
| Stroke - mm (in) | 107.95 (4.25) |
| Compression Ratio | 9.1:1 |
| Intake Air Method | Turbocharged |
| Number of Main Bearings | 5 |
| Connecting Rods | Forged Steel, Fractured Split, Bushingless |
| Cylinder Head | Cast Iron |
| Cylinder Liners | Cast Iron |
| Ignition | Coil Near Plug Solid State Inductive |
| Piston Type | Cast Aluminum |
| Crankshaft Type | Forged Steel |
| Lifter Type | Hydraulic |
| Intake Valve Material | Stainless Steel |
| Exhaust Valve Material | Stainless Steel |
| Hardened Valve Seats | High Steel Iron Alloy |

Engine Governing

| | |
|-------------------------------------|------------|
| Governor | Electronic |
| Frequency Regulation (Steady State) | ±0.25% |

Lubrication System

| | |
|-----------------------------|-----------------------------|
| Oil Pump Type | Gear Driving |
| Oil Filter Type | Full Flow Spin-On Cartridge |
| Crankcase Capacity - L (qt) | 20 (21) |

Cooling System

| | |
|------------------------|--------------------|
| Cooling System Type | Pressurized Closed |
| Fan Type | Pusher |
| Fan Speed - RPM | 1,750 |
| Fan Diameter - mm (in) | 533 (22) |

Fuel System

| | |
|--|----------------------|
| Fuel Type | Natural Gas, Propane |
| Fuel Shut Off | Generac |
| NG Operating Fuel Pressure (Standard) - kPa (in H ₂ O) | 1.2 - 3.5 (5 - 14) |
| Propane Operating Fuel Pressure (Standard) - kPa (in H ₂ O) | 1.7 - 3.5 (7 - 14) |

Engine Electrical System

| | |
|----------------------------|-------------------------------|
| System Voltage | 12 VDC |
| Battery Charger Alternator | Standard |
| Battery Size | See Battery Index 10000016949 |
| Battery Voltage | 12 VDC |
| Ground Polarity | Negative |

ALTERNATOR SPECIFICATIONS

| | |
|-------------------------------------|--------------------|
| Standard Model | R0048124Y21 |
| Poles | 4 |
| Field Type | Revolving |
| Insulation Class - Rotor | H |
| Insulation Class - Stator | H |
| Total Harmonic Distortion | <5% (3-Phase Only) |
| Telephone Interference Factor (TIF) | <50 |

| | |
|------------------------------------|--------------------------|
| Standard Excitation | Synchronous Brushless |
| Bearings | Sealed Ball |
| Coupling | Direct via Flexible Disc |
| Prototype Short Circuit Test | Yes |
| Voltage Regulator Type | Full Digital |
| Number of Sensed Phases | All |
| Regulation Accuracy (Steady State) | ±0.25% |

GGW060 | 4.5L | 60 kVA

INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



OPERATING DATA

POWER RATINGS

| | Standby | | Prime | |
|---------------------------------|--------------|-----------|--------------|-----------|
| Single-Phase 110/220 VAC @1.0pf | 60 kVA/60 kW | Amps: 218 | 54 kVA/54 kW | Amps: 196 |
| Three-Phase 231/400 VAC @0.8pf | 60 kVA/48 kW | Amps: 87 | 54 kVA/43 kW | Amps: 78 |

MOTOR STARTING CAPABILITIES (skVA)

| skVA vs. Voltage Dip | | | |
|----------------------|-----------------|----------------|-----|
| 110/220 VAC 1Ø | 30% | 231/400 VAC 3Ø | 30% |
| M0080124Y21 | Contact Factory | R004812Y421 | 104 |
| M0064124Y21 | Contact Factory | R0080124Y21 | 164 |

FUEL CONSUMPTION RATES*

| Natural Gas – m ³ /hr (scfh) | | | Propane Vapor – m ³ /hr (scfh) | | | Propane Liquid – Lph (gph) | | |
|---|------------|------------|---|-----------|-----------|----------------------------|------------|------------|
| Percent Load | Standby | Prime | Percent Load | Standby | Prime | Percent Load | Standby | Prime |
| 25% | 5.5 (195) | 5.1 (181) | 25% | 1.3 (46) | 1.1 (39) | 25% | 6.7 (1.8) | 6.0 (1.6) |
| 50% | 9.6 (339) | 8.8 (310) | 50% | 3.3 (118) | 2.9 (104) | 50% | 13.3 (3.5) | 12.0 (3.2) |
| 75% | 13.8 (487) | 12.5 (442) | 75% | 5.2 (185) | 4.7 (165) | 75% | 20.0 (5.3) | 18.0 (4.8) |
| 100% | 18.1 (639) | 16.4 (578) | 100% | 7.0 (248) | 6.3 (223) | 100% | 26.7 (7.1) | 24.0 (6.4) |

* Fuel supply installation must accommodate fuel consumption rates at 100% load.

COOLING

| | | Standby | Prime |
|---|---------------------------|------------------------------|-------------|
| Air Flow (Fan Air Flow Across Radiator) - Open Set | m ³ /min (cfm) | 102 (3,605) | 102 (3,605) |
| Coolant Flow | Lpm (gpm) | 75.1 (19.8) | 75.1 (19.8) |
| Coolant System Capacity | L (gal) | 33.7 (8.9) | 33.7 (8.9) |
| Maximum Operating Ambient Temperature | °C (°F) | 50 (120) | 50 (120) |
| Maximum Operating Ambient Temperature (Before Derate) | | See Bulletin No. 10000011319 | |
| Maximum Additional Radiator Backpressure | kPa (in H ₂ O) | 0.12 (0.5) | 0.12 (0.5) |

COMBUSTION AIR REQUIREMENTS

| | Standby | Prime |
|---|-----------|-----------|
| Flow at Rated Power - m ³ /min (cfm) | 3.2 (113) | 2.9 (104) |

ENGINE

| | | Standby | Prime |
|------------------------|----------------|-------------|-------------|
| Rated Engine Speed | RPM | 1,500 | 1,500 |
| Horsepower at Rated kW | hp | 79 | 72 |
| Piston Speed | m/min (ft/min) | 324 (1,063) | 324 (1,063) |
| BMEP | kPa (psi) | 1,076 (156) | 972 (141) |

EXHAUST

| | | Standby | Prime |
|--|---------------------------|-------------|-------------|
| Exhaust Flow (Rated Output) | m ³ /min (cfm) | 7.6 (269) | 7.0 (248) |
| Maximum Allowable Exhaust Backpressure (Post Silencer) | kPa (inHg) | 2.54 (0.75) | 2.54 (0.75) |
| Exhaust Temperature (Rated Output) | °C (°F) | 704 (1,300) | 699 (1,290) |


Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions.

Please contact a Generac Power Systems Industrial Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, and DIN6271 standards.

Standby - See Bulletin 0187500SSB


Prime - See Bulletin 0187510SSB

DIMENSIONS AND WEIGHTS*

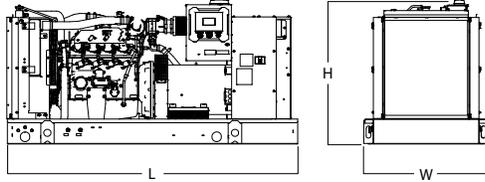


OPEN SET

| | |
|---------------------|--|
| L x W x H - mm (in) | 2,360 (92.9) x 1,014 (39.9) x 1,170 (46.0) |
| Weight - kg (lbs) | 872 - 950 (1,923 - 2,094) |

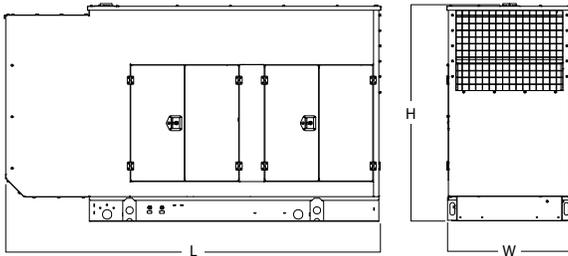


LEVEL 0 SOUND ATTENUATED ENCLOSURE

| | |
|---------------------|---|
| L x W x H - mm (in) | 3,068 (120.8) x 1,028 (40.5) x 1,754 (69.0) |
| Weight - kg (lbs) | Steel: 1,207 - 1,286 (2,662 - 2,834) Aluminum: 1,048 - 1,126 (2,310 - 2,483) |

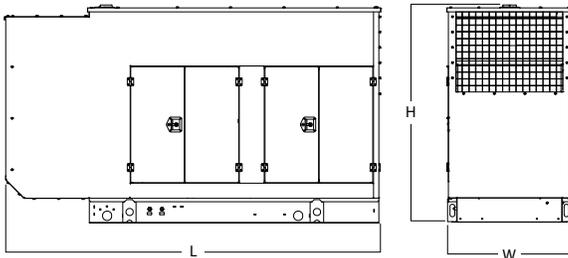

LEVEL 1 SOUND ATTENUATED ENCLOSURE

| | |
|---------------------|---|
| L x W x H - mm (in) | 3,068 (120.8) x 1,028 (40.5) x 1,754 (69.0) |
| Weight - kg (lbs) | Steel: 1,249 - 1,327 (2,753 - 2,925) Aluminum: 1,089 - 1,167 (2,401 - 2,573) |

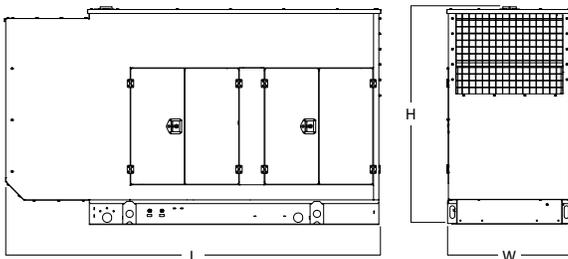

LEVEL 2 SOUND ATTENUATED ENCLOSURE

| | |
|---------------------|---|
| L x W x H - mm (in) | 3,068 (120.8) x 1,028 (40.5) x 1,754 (69.0) |
| Weight - kg (lbs) | Steel: 1,284 - 1,362 (2,831 - 3,003) Aluminum: 1,115 - 1,193 (2,458 - 2,630) |

* Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please contact a PRAMAC Industrial Dealer for detailed installation drawings.